


Features:

- Single Lamp Beads distributed evenly to help light more equal.
- Lifetime:50000hs
- No flash, No RF, No ultraviolet radiation
- Approved by CE, RoHS, UL, Can fast start.
- Aluminum radiator body design, beneficial to heat disipation
- Excellent self-cleaning fun
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load



Lighting distribution chart

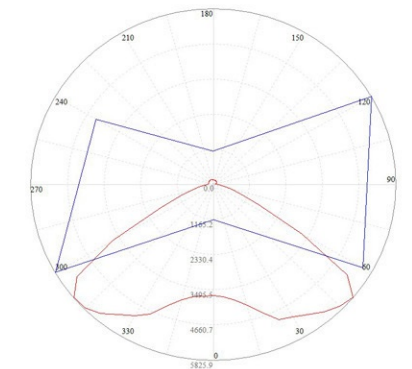

Specification

Model Number	HS-SL150W-D
Power	150w
Luminous Flux	15000lm
Input Voltage	AC90-295V
Color Temperature	3000-8000K
CRI	78Ra
LED Efficiency	>101lm/w
IP Rating	P65
Lamp Size	766*304*130mm
Lamp Weight	6.9kg

Color temperature

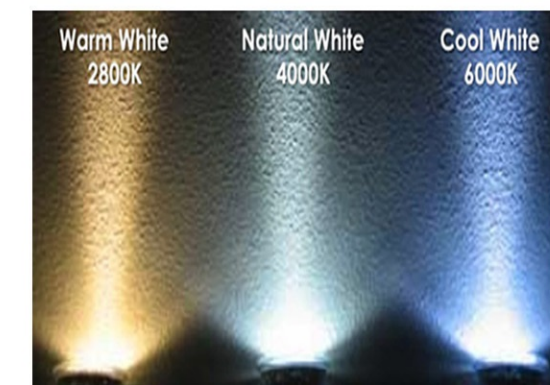

High Bright Single Bridgelux Chip



IP65 Meanwell Driver



3D heat dissipation & IP65



Adjustable 90° Beam Angle

