



## Hishine T8 led tube light quotation

sanan chip(Clear cover and milky cover are available at the same price)

Model	Power	LED QTY	CCT (K)	Length with pins (mm)	Luminou Flux (LM)	Weight
HS-T8L12W18	18w	132	4100	1378mm	1400lm±10%	380g
HS-T8L24W33	33w	180		2584mm	2600lm±10%	420g

### Basic T8 tube information from Hishine

Voltage	AC85-265V	Holder	G13	Lifespan	50,000h	
WorkingTemp	-20°C~40°C	Material	Aluminum alloy+PC	Diameter	26mm	



### Remarks

- 1.Warm white:3500K、 pure white:5000K、 cool white: 6500K;
- 2.LED tube light apply to inductive light holder,and please take down the starter before installing them ;
- 3.CE,RoHS,PSE certificate;

Calle Porcel N°214, Urb. María Isabel, Arequipa - Arequipa | Perú  
Tel.: (054) 507474 | RPC 987090104 | RPM #958343859  
E-mail: [ventas@energiainnovadora.com](mailto:ventas@energiainnovadora.com) | [www.energiainnovadora.com](http://www.energiainnovadora.com)

## Packing Information

Part No.	Package dimension	N.W.	G.W.
T8-10W-60	630X160X190mm , 20pcs/carton	0.21kg/PCS	6 kg/CTN
T8-20W -120	1230X160X190mm , 20pcs/carton	0.38kg/PCS	11 kg/CTN
T8-24W-150	1530X160X190mm , 20pcs/carton	0.42kg/PCS	13 kg/CTN



## Installation


Precaution: Switch off power before doing any works.

Step 1: Switch off the power before installation.

Step 2: Open the lamp holder, cut off the wire at point "X" on the drawing.

Step 3: Connect the wire without the starter and ballast, like the bold line on the drawing.

(1)Magnetic ballast

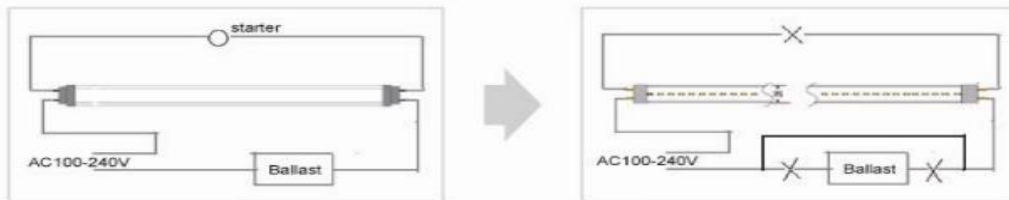


(2)Electronic ballast

Electronic ballast wire installation 【1 carry 1】



Electronic ballast wire installation 【1 carry 2】

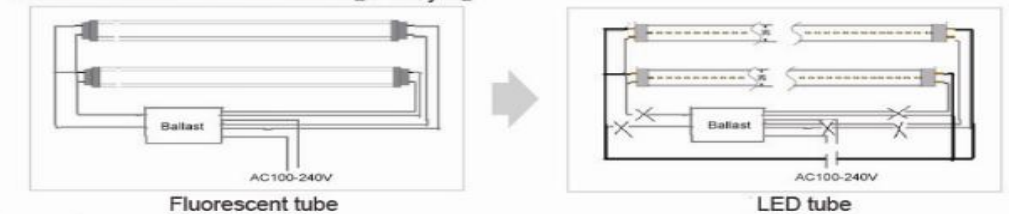

(3)Without ballast and starter,connect it directly with the Voltage AC100-240V

