



CATÁLOGO LUMINARIAS 2024



Iluminación exterior profesional

LED Flood Light, LED High Bay Light, LED Tunnel Light, LED Street Light etc

HQ-LED HIGH MAST LIGHT 250W-2000W




Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
250W	123*580*138mm	AC85-265V	130LM/W	25° / 45° / 60°	IP65	3000-6500K
500W	250*580*138mm	AC85-265V	130LM/W	25° / 45° / 60°	IP65	3000-6500K
750W	378*580*138mm	AC85-265V	130LM/W	25° / 45° / 60°	IP65	3000-6500K
1000W	505*580*138mm	AC85-265V	130LM/W	25° / 45° / 60°	IP65	3000-6500K
1250W	632*580*138mm	AC85-265V	130LM/W	25° / 45° / 60°	IP65	3000-6500K
1500W	760*580*138mm	AC85-265V	130LM/W	25° / 45° / 60°	IP65	3000-6500K
2000W	1013*580*138m	AC85-265V	130LM/W	25° / 45° / 60°	IP65	3000-6500K

HQ-LED FLOOD, TUNNEL LIGHT



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	350*75*110mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K
100W	350*155*110mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K
150W	350*240*110mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K
200W	350*315*110mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K
250W	350*400*110mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K
300W	400*305*180mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K
400W	400*410*180mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K
500W	400*515*180mm	AC85-265V	130LM/W	60/90	IP65	3000-6500K

HQ-LED STADIUM LIGHT-A

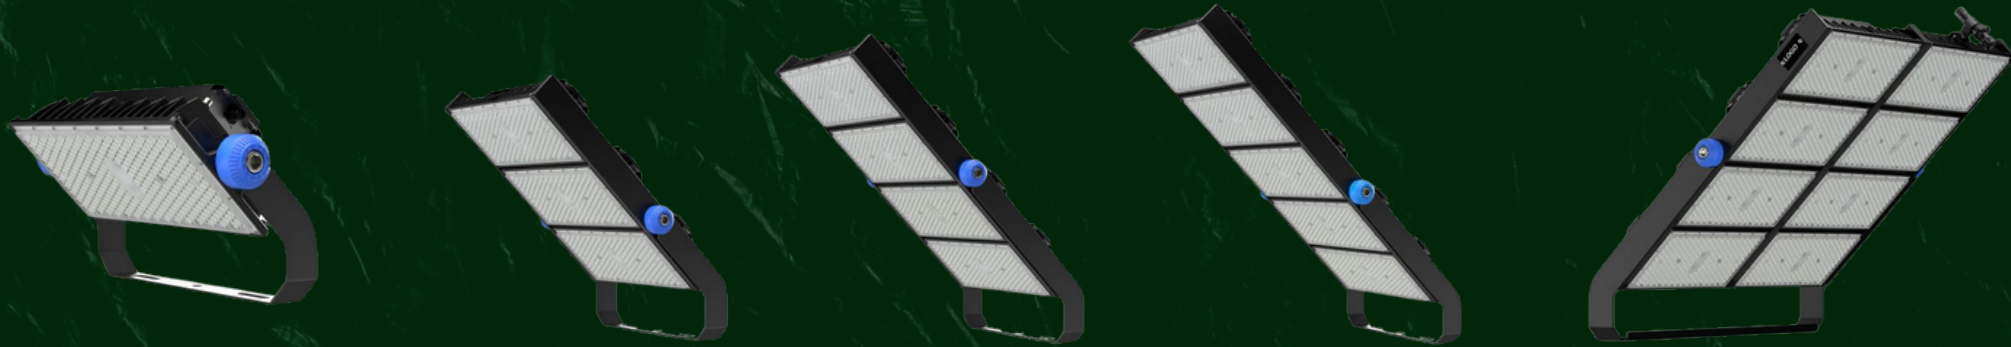

Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
250W	436*284*163mm	AC100-277V	140LM/W	30° / 45° / 60° / 90°	IP65	3000-6500K
500W	436*499*183mm	AC100-277V	140LM/W	30° / 45° / 60° / 90°	IP65	3000-6500K
750W	464*689*183mm	AC100-277V	140LM/W	30° / 45° / 60° / 90°	IP65	3000-6500K
1000W	464*879*182mm	AC100-277V	140LM/W	30° / 45° / 60° / 90°	IP65	3000-6500K
1250W	464*1069*183mm	AC100-277V	140LM/W	30° / 45° / 60° / 90°	IP65	3000-6500K
1500W	865*692*189mm	AC100-277V	140LM/W	30° / 45° / 60° / 90°	IP65	3000-6500K
2000W	865*882*189mm	AC100-277V	140LM/W	30° / 45° / 60° / 90°	IP65	3000-6500K

HQ-LED STADIUM LIGHT-B



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
300W	463*400*220mm	AC100-277V	140LM/W	15° / 30° / 60°	IP65	3000-6500K
500W	570*480*324mm	AC100-277V	140LM/W	15° / 30° / 60°	IP65	3000-6500K
					IP65	3000-6500K
600W	570*480*324mm	AC100-277V	140LM/W	15° / 30° / 60°	IP65	3000-6500K
750W	565*652*352mm	AC100-277V	140LM/W	15° / 30° / 60°	IP65	3000-6500K
					IP65	3000-6500K
1000W	640*730*390mm	AC100-277V	140LM/W	15° / 30° / 60°	IP65	3000-6500K
1200W	640*730*390mm	AC100-277V	140LM/W	15° / 30° / 60°	IP65	3000-6500K

HQ-LED STREET LIGHT 40W-150W



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
40W	432*160*90mm	AC85-265V	130LM/W	70*140°	IP65	3000-6500K
60W	432*160*90mm	AC85-265V	130LM/W	70*140°	IP65	3000-6500K
90W	432*160*90mm	AC85-265V	130LM/W	70*140°	IP65	3000-6500K
120W	632*215*90mm	AC85-265V	130LM/W	70*140°	IP65	3000-6500K
150W	632*215*90mm	AC85-265V	130LM/W	70*140°	IP65	3000-6500K

HQ-LEDS TREET LIGHT 40W-200W



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
40W	420*180*100mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
60W	470*180*110mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
100W	560*240*115mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
150W	690*280*130mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
200W	740*280*130mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K

HQ-LED STREET LIGHT 40W-200W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

40W

330*150*65mm

AC85-265V

130LM/W

150*85° / 140*70°

IP65

3000-6500K

60W

375*150*65mm

AC85-265V

130LM/W

150*85° / 140*70°

IP65

3000-6500K

100W

525*180*65mm

AC85-265V

130LM/W

150*85° / 140*70°

IP65

3000-6500K

150W

650*260*95mm

AC85-265V

130LM/W

150*85° / 140*70°

IP65

3000-6500K

200W

700*260*95mm

AC85-265V

130LM/W

150*85° / 140*70°

IP65


3000-6500K

HQ-LED STREET LIGHT 50W-200W




Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	510*210*110mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
100W	580*265*110mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
150W	685*265*110mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
200W	735*280*110mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K

HQ-LED STREET LIGHT 50W-200W

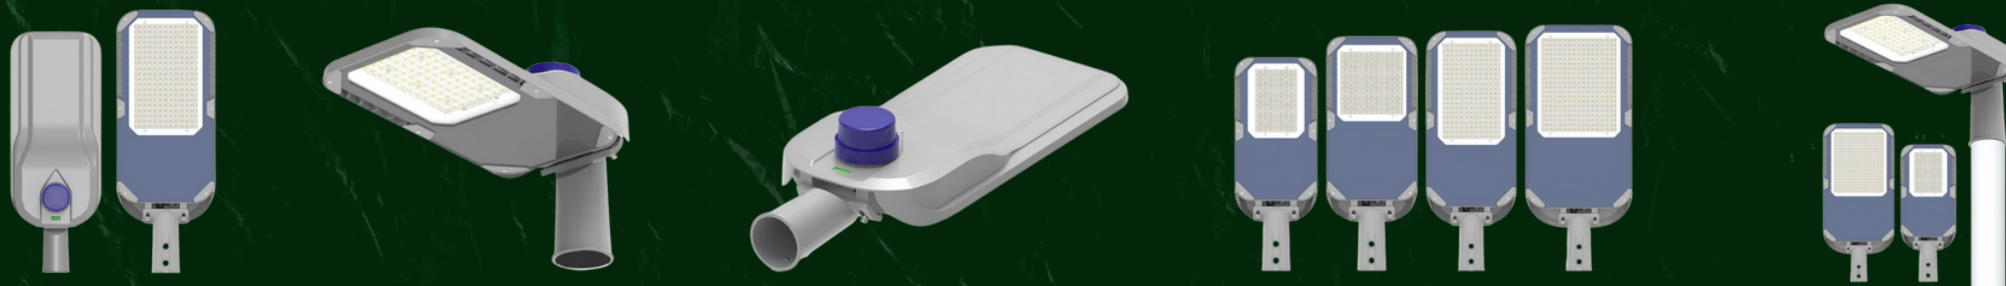




Potencia	Dimensión	Voltaje de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	265*112*55mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
100W	565*220*85mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
150W	635*240*85mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
200W	665*290*85mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K

HQ-LED STREET LIGHT 50W-200W

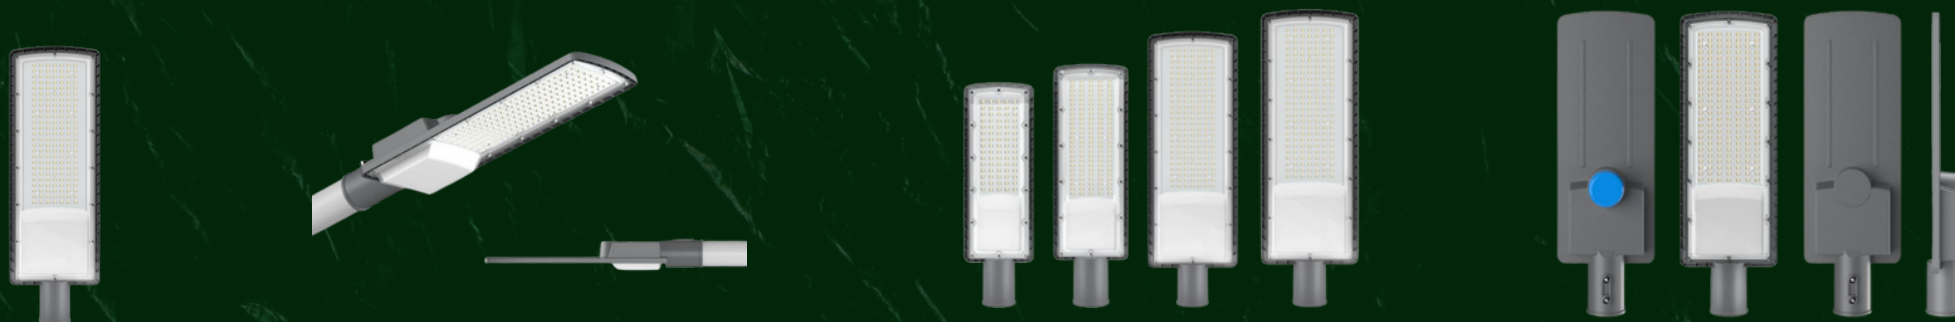

Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	395*125*62mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
100W	465*145*73mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
150W	535*160*73mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
200W	605*200*73mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K

HQ-LED STREET LIGHT 50W-200W

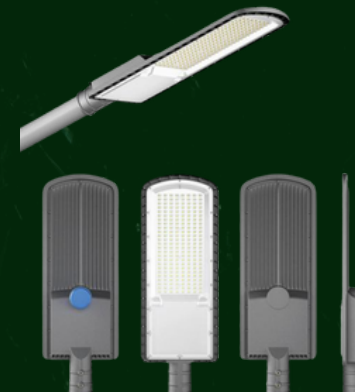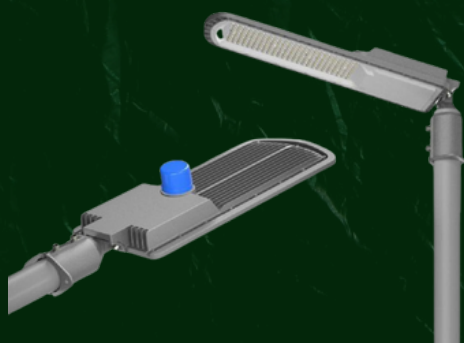


Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	495*170*70mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
100W	595*190*70mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
150W	665*210*80mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K
200W	715*230*80mm	AC85-265V	130LM/W	150*85° / 140*70°	IP65	3000-6500K

HQ-LED STREET LIGHT 50W-200W



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	495*310*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K
100W	621*310*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K
150W	621*310*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K
200W	769*320*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K

HQ-PHOTOCELL LED STREET LIGHT

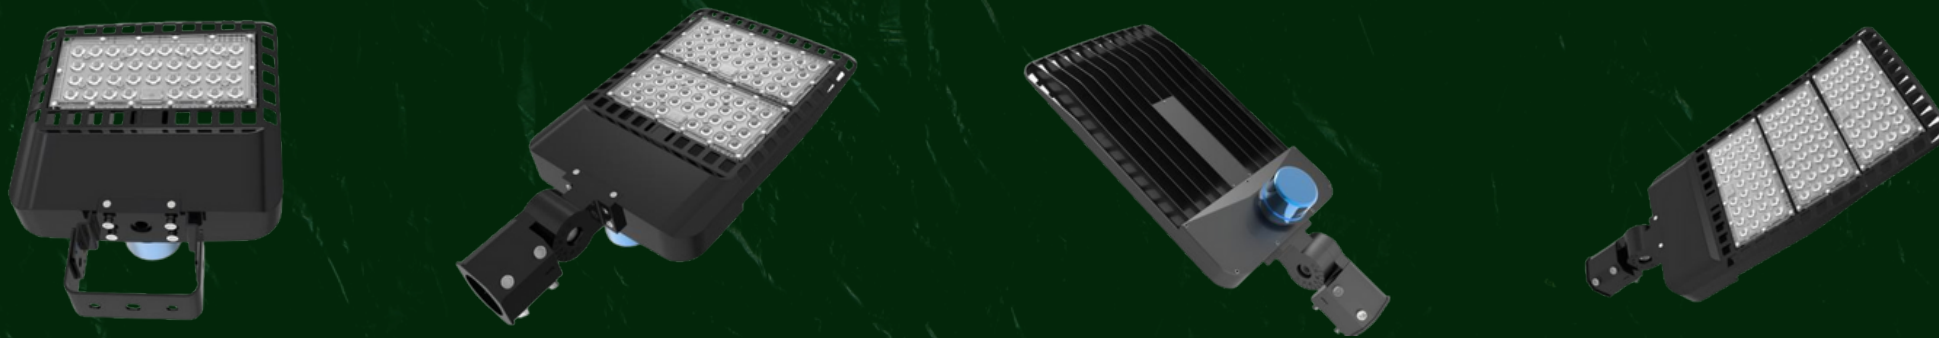

Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
100W	495*310*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K
150W	621*310*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K
200w	621*310*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K
250W	769*320*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500K
300W	769*320*84mm	AC85-265V	130LM/W	80*150°	IP65	3000-6500k

HQ-LED STREET LIGHT 50W-350W



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	350*320*83mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
100W	425*320*83mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
150W	500*320*83mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
200W	575*320*83mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
250W	650*320*83mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
300W	725*320*83mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
350W	800*320*83mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K

HQ-UFO LED HIGH BAY LIGHT 100W-240W




Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
100W	225*80mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
150W	∅ 268*90mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
200W	∅ 310*95mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
240W	∅ 310*95mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K

HQ-UFO LED HIGH BAY LIGHT 100W-240W



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
100W	Φ260*150mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
150W	Φ300*165mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
200W	Φ350*180mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
240W	Φ350*180mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K

HQ-UFO LED HIGH BAY LIGHT 100W-200W

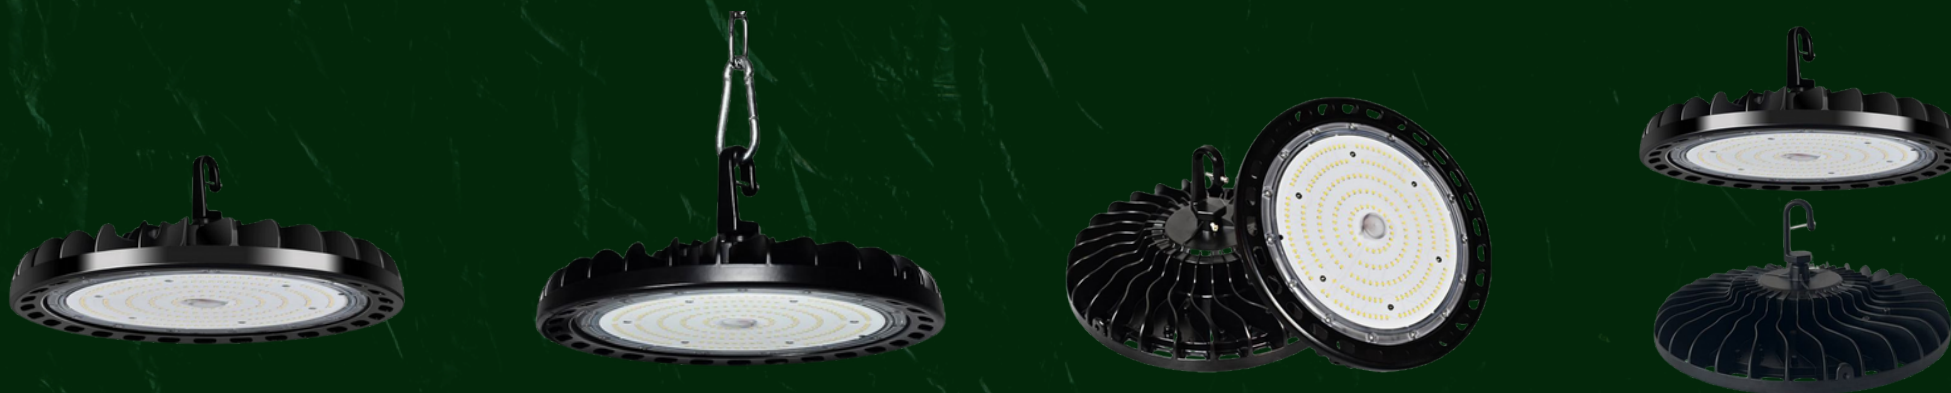


Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
100W	Φ230*130mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
150W	Φ275*130mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
200W	Φ320*130mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K

HQ-UFO LED HIGH BAY LIGHT 100W-240W



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
100W	Φ270*150mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
150W	Φ315*160mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
200W	Φ315*160mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
240W	Φ330*170mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K

HQ-UFO LED HIGH BAY LIGHT 100W-300W

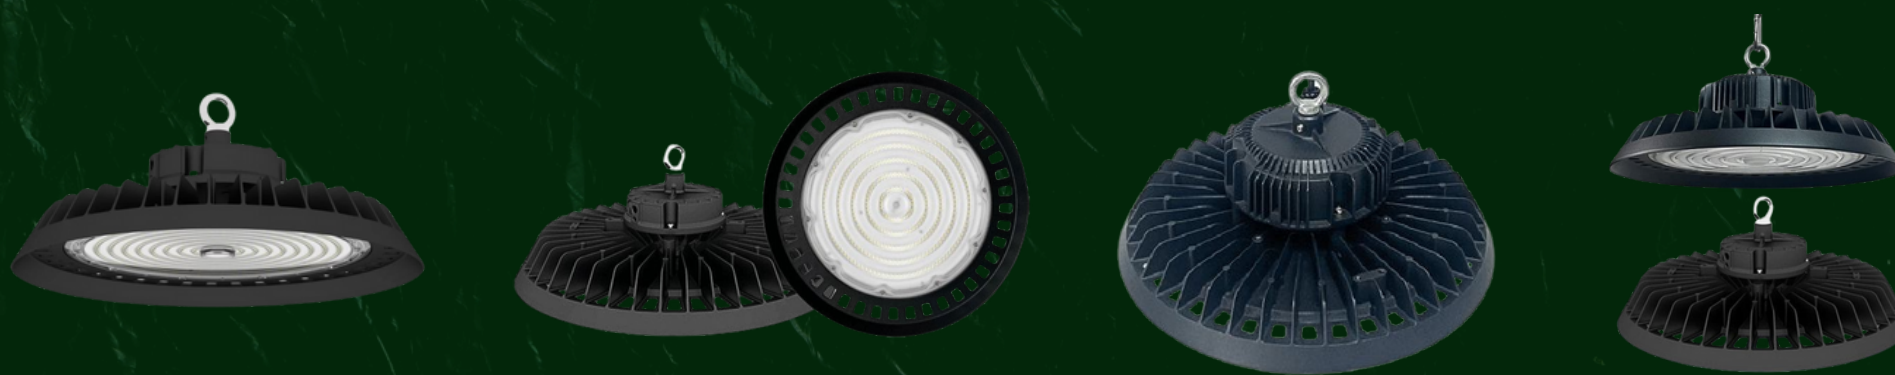

Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
100W	Φ255*165mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
150W	Φ310*170mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
200W	Φ355*175mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
240W	Φ355*175mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K
300W	Φ405*180mm	AC100-277V	130LM/W	60/90/120	IP65	3000-6500K

HQ-UFO LED HIGH BAY LIGHT 100W-200W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

100W

Φ255*155mm

AC100-277V

130LM/W

60/90/120

3000-6500K

150W

Φ310*160mm

AC100-277V

130LM/W

60/90/120

3000-6500K

200W

Φ355*175mm

AC100-277V

130LM/W

60/90/120

3000-6500K

HQ-LED HIGH BAY LIGHT



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
100W	Φ440*H410mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
150W	Φ440*H428mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
200W	Φ440*H523mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
250W	Φ440*H445mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K
300W	Φ440*H485mm	AC85-265V	130LM/W	60/90/120	IP65	3000-6500K

HQ-IP65 LED PROJECTION LIGHT



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

120W

Φ360*H365mm

AC85-265V

130LM/W

30/60/90

IP65

3000-6500K

150W

Φ360*H365mm

AC85-265V

130LM/W

30/60/90

IP65

3000-6500K

200W

Φ360*H365mm

AC85-265V

130LM/W

30/60/90

IP65

3000-6500K

300W

Φ360*H405mm

AC85-265V

130LM/W

30/60/90

IP65

3000-6500K

400W

Φ360*H405mm

AC85-265V

130LM/W

30/60/90

IP65

3000-6500K

500W

Φ360*H405mm

AC85-265V

130LM/W

30/60/90

IP65

3000-6500K

HQ- ULTRATHIN LED FLOOD LIGHT



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

50W

220*310*50mm

AC85-265V

130LM/W

60/120

IP65

3000 - 6500K

100W

330*430*60mm

AC85-265V

130LM/W

60/120

IP65

3000 - 6500K

150W

295*402*60mm

AC85-265V

130LM/W

60/120

IP65

3000 - 6500K

200W

360*470*60mm

AC85-265V

130LM/W

60/120

IP65

3000 - 6500K

HQ-LED FLOOD LIGHT 30W-200W



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
30W	219*191*63mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
50W	281*220*112mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
70W	281*220*112mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
100W	309*267*182mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
150W	364*298*186mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
200W	464*344*196mm	AC85-265V	100LM/W	120°	IP65	3000-6500K

HQ-LED FLOOD LIGHT 30W-300W




Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
30W	160*180*35mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
50W	190*220*35mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
100W	240*280*55mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
150W	270*310*55mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
200W	300*345*55mm	AC100-277V	120LM/W	120°	IP65	3000-6500K
300W	439*483*67mm	AC100-277V	120LM/W	120°	IP65	3000-6500K

HQ-EXPLOSION PROOF LED TRI-PROOF LIGHT



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
30W	585*93*78mm	AC100-277V	110LM/W	120°	IP65	3000-6500K
40W	1185*93*78mm	AC100-277V	110LM/W	120°	IP65	3000-6500K
60W	1185*93*78mm	AC100-277V	110LM/W	120°	IP65	3000-6500K
80W	1485*93*78mm	AC100-277V	110LM/W	120°	IP65	3000-6500K
100W	1485*93*78mm	AC100-277V	110LM/W	120°	IP65	3000-6500K

HQ- EXPLOSION PROOF LED LINEAR LIGHT

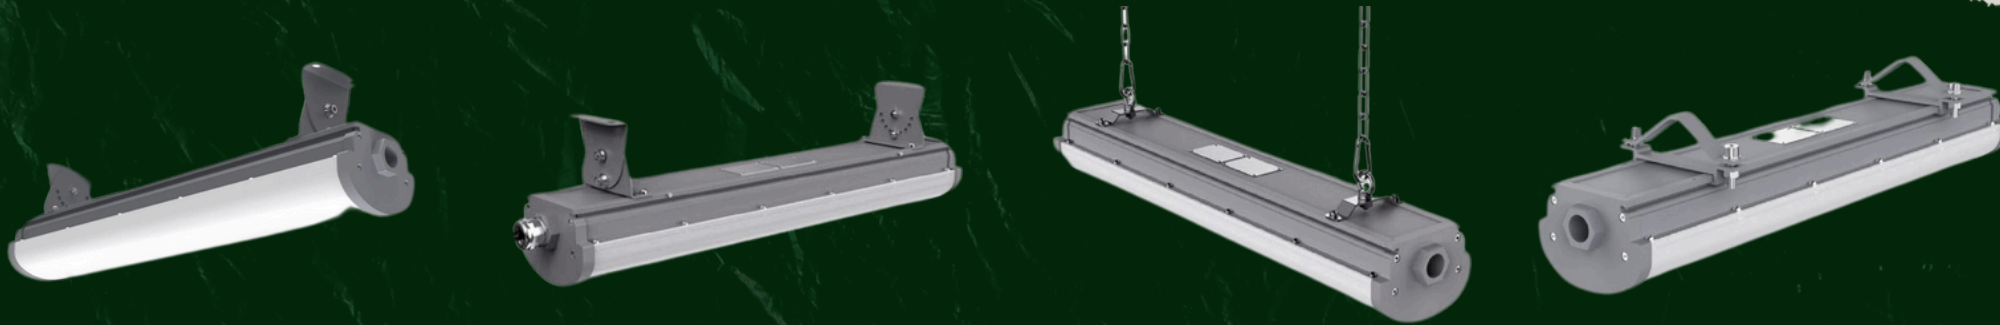

Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
20W	329*125*168mm	AC100-277V	120LM/W	120°	IP66	3000-6500K
30W	629*125*168mm	AC100-277V	120LM/W	120°	IP66	3000-6500K
40W	929*125*168mm	AC100-277V	120LM/W	120°	IP66	3000-6500K
50W	929*125*168mm	AC100-277V	120LM/W	120°	IP66	3000-6500K
60W	1229*125*168mm	AC100-277V	120LM/W	120°	IP66	3000-6500K
80W	1229*125*168mm	AC100-277V	120LM/W	120°	IP66	3000-6500K
100W	1229*125*168mm	AC100-277V	120LM/W	120°	IP66	3000-6500K

HQ- LED LINEAR HIGHBAY LIGHT 100W-320W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

100W	625*200*50mm	AC100-277V	130LM/W	120°	IP40	3000-6500K
150W	625*320*50mm	AC100-277V	130LM/W	120°	IP40	3000-6500K
200W	900*320*50mm	AC100-277V	130LM/W	120°	IP40	3000-6500K
240W	900*320*50mm	AC100-277V	130LM/W	120°	IP40	3000-6500K
320W	1200*320*50mm	AC100-277V	130LM/W	120°	IP40	3000-6500K

HQ- LED CANOPY LIGHT 50W-100W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

50W	265*265*97mm	AC100-277V	100LM/W	120°	IP65	3000-6500K
75W	265*265*97mm	AC100-277V	100LM/W	120°	IP65	3000-6500K
100W	315*315*97mm	AC100-277V	100LM/W	120°	IP65	3000-6500K

HQ- LED WALL PACK LIGHT 40W-120W





Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
40W	332*235*172mm	AC100-277V	130LM/W	120°	IP65	3000-6500K
60W	332*235*172mm	AC100-277V	130LM/W	120°	IP65	3000-6500K
100W	332*235*172mm	AC100-277V	130LM/W	120°	IP65	3000-6500K
120W	332*235*172mm	AC100-277V	130LM/W	120°	IP65	3000-6500K

HQ- LED GARDEN LIGHT-A



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
50W	Φ360*504mm	AC100-277V	130LM/W	120°	IP65	3000-6500K
60W	Φ360*504mm	AC100-277V	130LM/W	120°	IP65	3000-6500K
100W	Φ360*504mm	AC100-277V	130LM/W	120°	IP65	3000-6500K
150W	Φ360*504mm	AC100-277V	130LM/W	120°	IP65	3000-6500K

HQ- LED GARDEN LIGHT-B

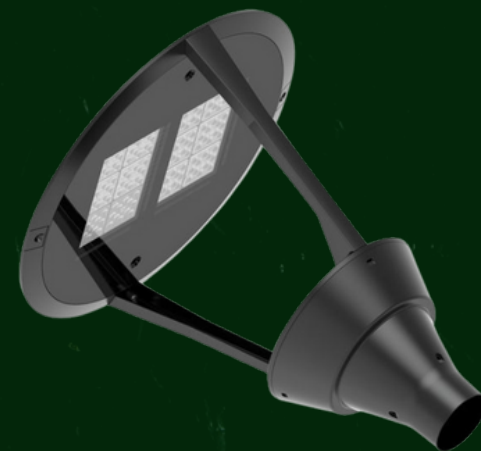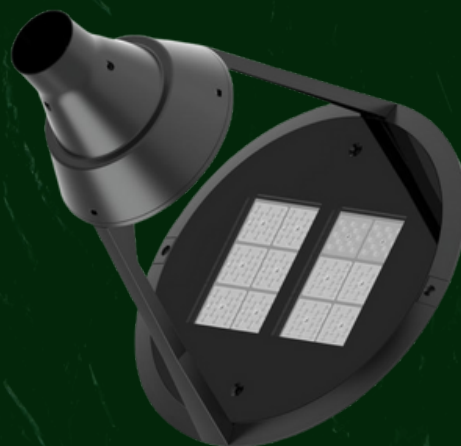

Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

50W

Φ452*542mm

AC100-277V

130LM/W

120°

IP65

3000-6500K

100W

Φ452*542mm

AC100-277V

130LM/W

120°

IP65

3000-6500K

150W

Φ452*542mm

AC100-277V

130LM/W

120°

IP65


3000-6500K

HQ-ALL IN ONE SOLAR STREET LIGHT



Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
40W	848*385*108mm	12V	170LM/W	140*70°	IP65	3000-6500K
50W	1077*385*180mm	12V	170LM/W	140*70°	IP65	3000-6500K
60W	1077*385*180mm	12V	170LM/W	140*70°	IP65	3000-6500K
80W	1548*385*108mm	12V	170LM/W	140*70°	IP65	3000-6500K
100W	1863*385*108mm	12V	170LM/W	140*70°	IP65	3000-6500K
120W	1863*385*108mm	12V	170LM/W	140*70°	IP65	3000-6500K

SS 109 – LED STREET LIGHT 50W–300W

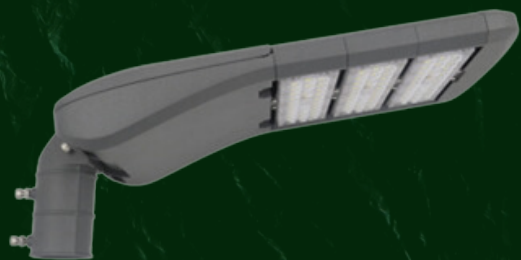

Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

50W	310*526*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
80W	310*609*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
100W	310*609*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
120W	310*609*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
150W	310*692*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
180W	310*692*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
200W	310*775*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
240W	310*775*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K
300W	310*858*130mm	180-265V	140LM/W	145*75°	IP66	3000-6000K

SS 102 – LED STREET LIGHT 30W-240W



Potencia

Dimensión

Voltio de entrada

Eficiencia



Ángulo de haz

Clasificación del IP

CCT

30W	620*287*118mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
50W	620*287*118mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
60W	310*609*130mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
75-80W	620*287*118mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
100W	738*289*118mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
120W	738*289*118mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
150W	922*362*140mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
200W	922*362*140mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
240W	922*362*140mm	180-265V	125LM/W	145*75°	IP66	3000-6000K

SS 106 - LED STREET LIGHT 40W-200W

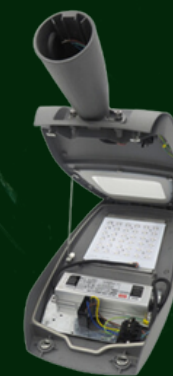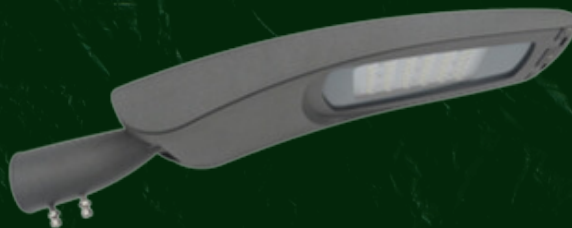

Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

40W	641*241*114mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
60W	641*241*114mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
75-80W	641*241*114mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
100W	738*289*116mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
120W	738*289*116mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
150W	922*360*144mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
200W	922*360*144mm	180-265V	125LM/W	145*75°	IP66	3000-6000K

SS 103 - LED STREET LIGHT 30W-200W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

30W	507*210*143mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
50W	507*210*143mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
60W	616*259*186mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
75-80W	616*259*186mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
100W	616*259*186mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
120W	676*303*186mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
150W	676*303*186mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
200W	753*366*198mm	180-265V	125LM/W	145*75°	IP66	3000-6000K

SS 104 - LED STREET LIGHT 30W-200W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

30W	475*238*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
50W	475*238*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
75-80W	646*303*129mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
100W	646*303*129mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
120W	646*303*129mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
150W	864*374*172mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
200W	864*374*172mm	180-265V	125LM/W	145*75°	IP66	3000-6000K

SS 105 - LED STREET LIGHT 30W-200W



Potencia

Dimensión

Voltio de entrada

Eficiencia


Ángulo de haz

Clasificación del IP

CCT

30W	577*233*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
50W	577*233*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
60W	577*233*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
75-80W	627*271*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
100W	627*271*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
120W	627*271*103mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
150W	768*301*104mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
200W	768*301*104mm	180-265V	125LM/W	145*75°	IP66	3000-6000K

SS 110 – LED STREET LIGHT 30W–200W

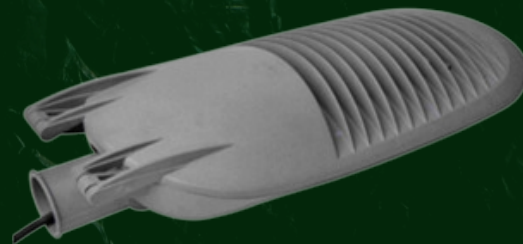

Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

30W	410*180*93mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
40W	485*230*93mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
60W	485*230*93mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
75-80W	622*292*112mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
100W	622*292*112mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
120W	622*292*112mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
150W	853*367*137mm	180-265V	125LM/W	145*75°	IP66	3000-6000K
200W	853*367*137mm	180-265V	125LM/W	145*75°	IP66	3000-6000K

SS 112 - LED STREET LIGHT 100W-300W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

100W	422*318*136mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
150W	522*318*136mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
200W	600*318*136mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
240W	600*318*136mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
300W	853*318*136mm	180-265V	110LM/W	150*75°	IP65	3000-6000K

SS 111 – LED STREET LIGHT 100W-150W



Potencia

Dimensión

Voltio de entrada

Eficiencia


Ángulo de haz

Clasificación del IP

CCT

100W	691*305*134mm	180-265V	110LM/W	145*75°	IP66	3000-6000K
120W	691*305*134mm	180-265V	110LM/W	145*75°	IP66	3000-6000K
150W	691*305*134mm	180-265V	110LM/W	145*75°	IP66	3000-6000K

SS 112 - LED STREET LIGHT 100W-300W

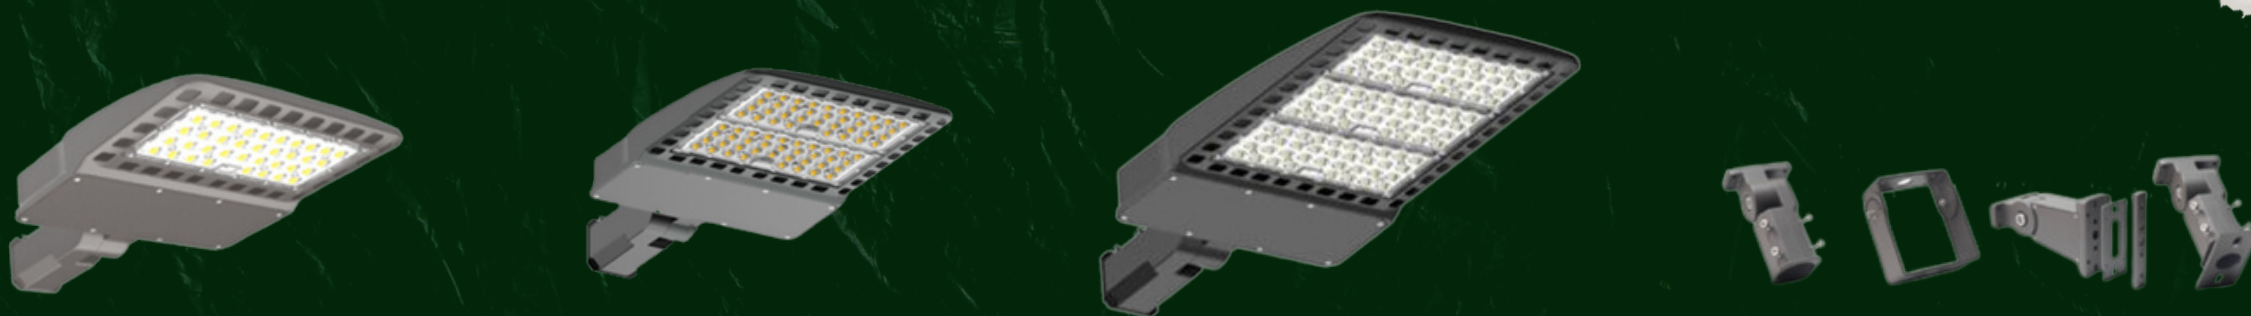

Potencia

Dimensión

Voltio de entrada

Eficiencia


Ángulo de haz

Clasificación del IP

CCT

100W	542*316*65mm	180-265V	140LM/W	150*80°	IP66	3000-6000K
150W	542*316*65mm	180-265V	140LM/W	150*80°	IP66	3000-6000K
200W	603*316*65mm	180-265V	140LM/W	150*80°	IP66	3000-6000K
250W	603*316*65mm	180-265V	140LM/W	150*80°	IP66	3000-6000K
300W	785*316*75mm	180-265V	140LM/W	150*80°	IP66	3000-6000K

SS 113 – LED STREET LIGHT 90W–300W

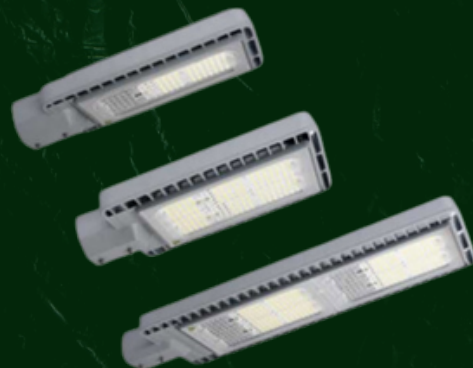

Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	Clasificación del IP	CCT
90W	495*210*86mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
120W	522*295*86mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
150W	522*295*86mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
180W	522*295*86mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
240W	853*295*86mm	180-265V	110LM/W	150*75°	IP65	3000-6000K
300W	853*295*86mm	180-265V	110LM/W	150*75°	IP65	3000-6000K

SS 113 – LED STREET LIGHT 30W-150W



Potencia

Dimensión

Voltio de entrada

Eficiencia


Ángulo de haz

Clasificación del IP

CCT

30W	335*145*60mm	180-265V	100LM/W	150*80°	IP65	3000-6000K
50W	435*145*65mm	180-265V	100LM/W	150*80°	IP65	3000-6000K
100W	510*190*70mm	180-265V	100LM/W	150*80°	IP65	3000-6000K
120W	560*160*75mm	180-265V	100LM/W	150*80°	IP65	3000-6000K
150W	600*210*75mm	180-265V	100LM/W	150*80°	IP65	3000-6000K

SL – YD – LED FLOOD & TUNNEL LIGHT QUOTATION

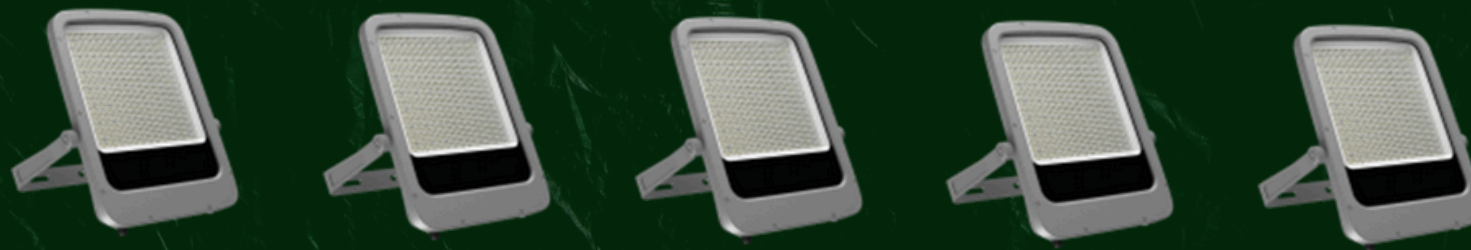

Potencia

Dimensión

Voltio de entrada

Eficiencia


Ángulo de haz

Clasificación del IP

CCT

300W	Φ586*440*79mm	85-265V	130-150LM/W		IP65	3000-6000K
400W	Φ586*440*79mm	85-265V	130-150LM/W		IP65	3000-6000K
500W		85-265V	130-150LM/W		IP65	3000-6000K
600W	Φ714*533*89mm	85-265V	130-150LM/W		IP65	3000-6000K
700W	Φ714*533*89mm	85-265V	130-150LM/W		IP65	3000-6000K

SS – FL – LED SPORTS LIGHT 500W – 1000W

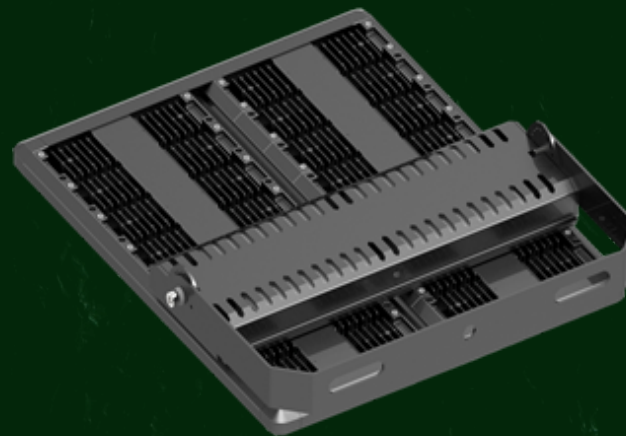

Potencia

Dimensión

Voltio de entrada

Eficiencia


Ángulo de haz

Clasificación del IP

CCT

500W	42*65*14cm	180-265V	140LM/W	145*75°	IP66	3000-6000K
600W	51*65*14cm	180-265V	140LM/W	145*75°	IP66	3000-6000K
800W	75*65*14cm	180-265V	140LM/W	145*75°	IP66	3000-6000K
1000W	83*65*14cm	180-265V	140LM/W	145*75°	IP66	3000-6000K

SS – FL – LED SPORTS LIGHT 400W – 1000W

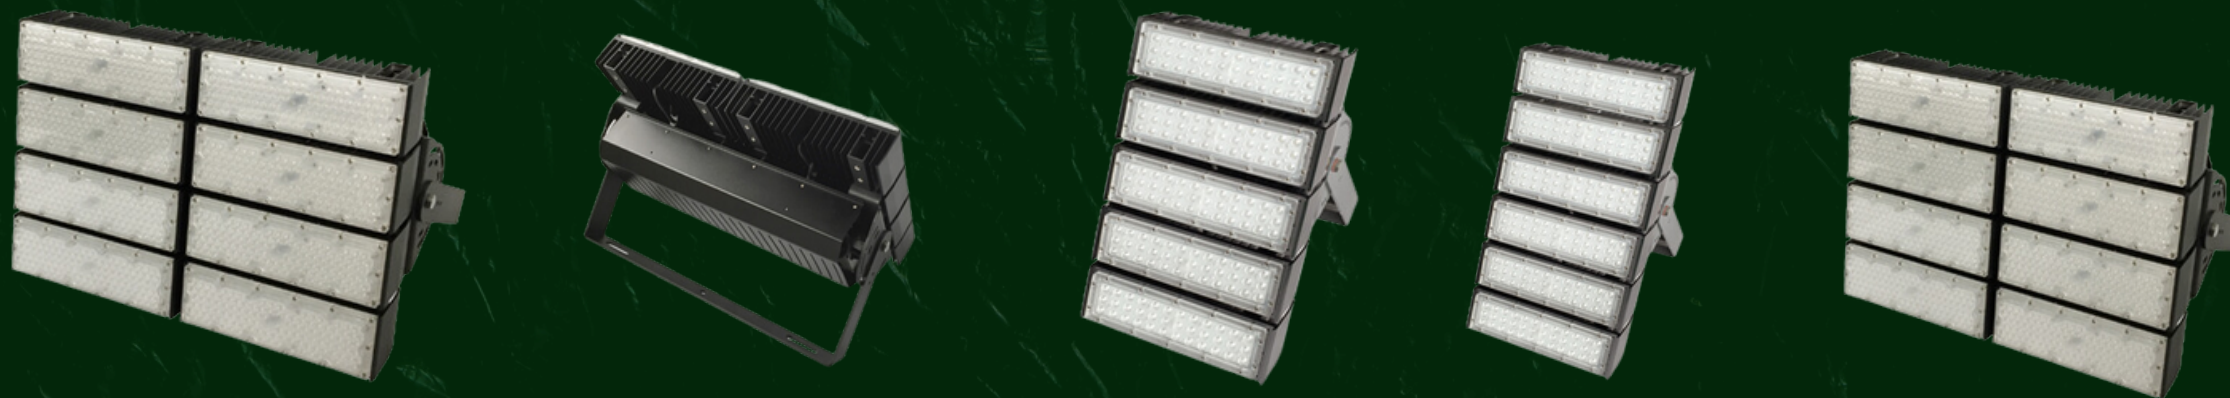

Potencia

Dimensión

Voltio de entrada

Eficiencia



Ángulo de haz

Clasificación del IP

CCT

400W	46x28x19cm	180-265V	100-135LM/W	3030/3535	IP66	3000-6000K
500W	54x28x19cm	180-265V	100-135LM/W	3030/3535	IP66	3000-6000K
600W	55x37x19cm	180-265V	100-135LM/W	3030/3535	IP66	3000-6000K
800W	55x46x19cm	180-265V	100-135LM/W	3030/3535	IP66	3000-6000K
1000W	55x55x19cm	180-265V	100-135LM/W	SMD 3030	IP66	3000-6000K

SS – FL – LED SPORTS LIGHT 300W – 500W

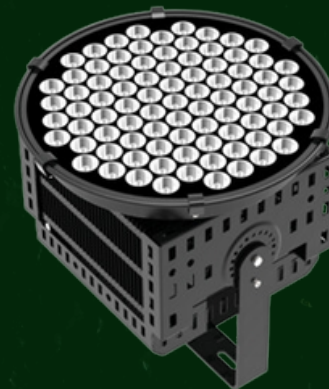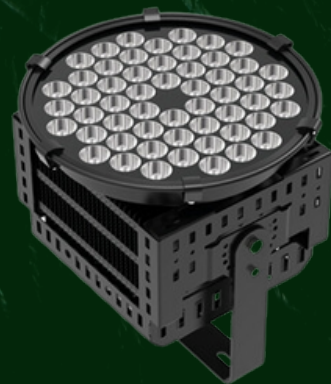

Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

Clasificación del IP

CCT

300W	Φ369*356mm	180-265V	120LM/W	10/15°	IP66	3000-6000K
400W	Φ369*356mm	180-265V	120LM/W	10/15°	IP66	3000-6000K
500W	Φ471*407mm	180-265V	120LM/W	10/15°	IP66	3000-6000K

CH- LED CORN LIGHT 6W - 15W



Potencia

Dimensión

Voltio de entrada

Eficiencia

Ángulo de haz

CCT

6W

Φ35*117mm

100-277V

600 LM

360°

2700-6500K

8W

Φ35*117mm

100-277V

800 LM

360°

2700-6500K

10W

Φ35*149mm

100-277V

1000 LM

360°

2700-6500K

12W

Φ35*149mm

100-277V

1200 LM

360°

2700-6500K

15W

Φ35*169mm


100-277V

1450 LM

360°

2700-6500K

CH - FL - LED FLOOD LIGHT 50W - 300W

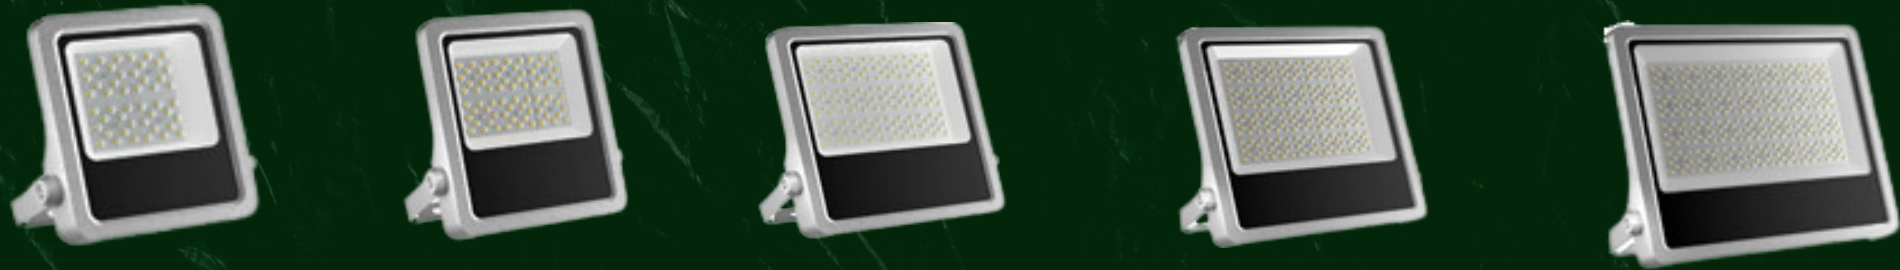

Potencia	Dimensión	Voltio de entrada	Eficiencia	Ángulo de haz	CCT
50W	263x224x45MM	100-277V / 100-347V	6500LM	120°	2700-6500K
100W	315x269x50MM	100-277V / 100-347V	13000LM	120°	2700-6500K
150W	370x322x56MM	100-277V / 100-347V	19500LM	120°	2700-6500K
200W	416x352x58MM	100-277V / 100-347V	26000LM	120°	2700-6500K
300W	481x408x60MM	100-277V / 100-347V	39000LM	120°	2700-6500K